



ULTRA 48

ADA compliant, advanced materials handling, and dependability.

Set your business above the competition and meet ADA compliance requirements by serving the special needs of all consumers. Envipco's Ultra48 delivers these advantages with an in-feed and user controls that are 48" (122 cm) above the floor—well within arm's reach of individuals that use a wheel chair or a motorized shopping cart. Even small children helping their parents can easily operate the Ultra48. And, a redesigned lower cabinet provides increased storage, reducing bin changes while saving employee labor and expense.

Contemporary Styling

Molded upper door and attractive color combinations appeal to consumers and simplify maintenance

Extra Large Display

High-resolution color LCD provides clear and easy-to-read graphics and text

Ring Scanner

Exclusive ring scanner container identification system literally wraps around the container, providing ULTRA fast container recognition

Illuminated In-Feed

Red and green indicator LEDs change colors to indicate machine readiness, helping consumers process containers quickly and easily

ADA Compliant

48" (122 cm) high in-feed and receipt dispenser

Densification


New compaction technology flattens aluminum cans, shreds or flattens plastic bottles, and crushes or soft drops whole glass bottles

Storage

Increased capacity reduces bin changes



MEASUREMENTS

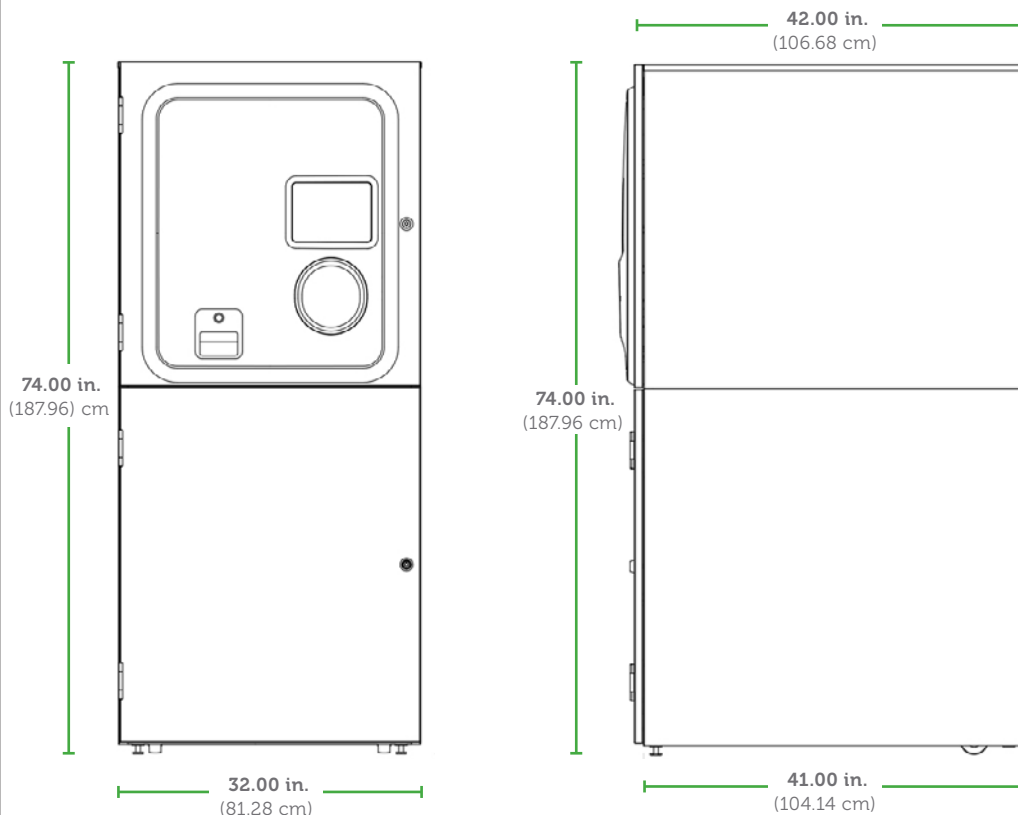

Specifications

Performance

Up to 42 containers per minute

Container Size

- Plastic containers up to 3 liter
- Aluminum cans up to 1 liter
- Glass bottles up to 44 oz. (1.3 liter)

Storage Capacity*

Bin System

- 1745 cu ft (0.49 cu m), per cabinet
- Aluminum cans: 3,244
- Plastic bottles: 942
- Glass bottles-Soft Drop: 199
- Glass bottles-Crush: 485

Bag System

- 15.5 cu ft (0.44 cu m), per cabinet
- Aluminum cans: 2,888
- Plastic bottles: 839

Densification

- Flattened can and plastic (STD)
- Glass crush or soft drop

Container Identification

- Ring laser scanner system
- Aluminum and PET sensors

Standard Equipment

- RVM to host digital dispatch
- Advanced fraud prevention

Communication and Data Management

- LAN interface (Ethernet TCP/IP)
- On site & remote via site controller
- Proprietary Win RVM software

Consumer Interface

- Continuous feed entry port
- 10.4" (26.4 cm) High resolution color LCD
- High resolution graphics printer
- ADA Compliant, 48" high illuminated in-feed

Cabinet

- Durable electrostatic powder coat finish
- Roller mounted base with levelers

Machine

- Dimensions: 74"h x 32"w x 42"d (18796 cm h x 81.28 cm w x 106.68 cm d)
- Footprint: 9 sq ft (0.84 sq m)
- Weight: Approximately 1,020lbs (463 kg)

Optional Equipment

- Loyalty card reader
- Audible or visual alert
- External alarm

Electrical

- 208-240 VAC 3-phase, 60HZ, 20A service, NEMA L15-20R receptacle (STD)
- 400 VAC 3-phase, 50Hz, 3A service

Environment

32°F – 95°F (0°C – 35°C)



* Aluminum and Glass assume 12oz (355ml) containers, PET assumes 20oz (591 ml) containers

Environmental Products Corporation 99 Great Hill Road, Naugatuck, CT 06770 USA

Phone 1-800-275-3861 | Fax 1-203-720-9302 | www.envipco.com

